




RAM® Tough-Tap™ Universal Trail Camera Mount - Assembly & Installation

The last trail cam mount you'll ever need.


Parts Index:

- A. Ball with Self-Tapping Threads (QTY. 1)
- B. Short Double Socket Arm (QTY. 1)
- C. Ball with 1/4"-20 Threads (QTY. 1)




Follow these steps for a tool-less installation. For surfaces too tough to install by hand, a 5/8" wrench may be used.


1. Assemble the ball components in the shown orientation: Self-tapping threads pointing sideways, 1/4"-20 thread facing upward.



2. Grab onto Socket Arm and 1/4"-20 Ball, and position self-tapping threads against desired mounting point.

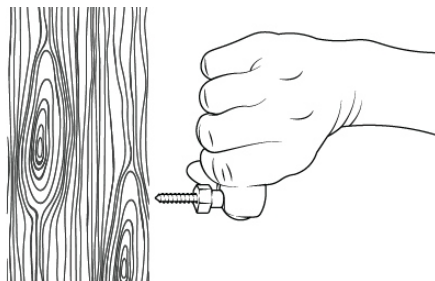

3. Turn clockwise to drive mount into surface.

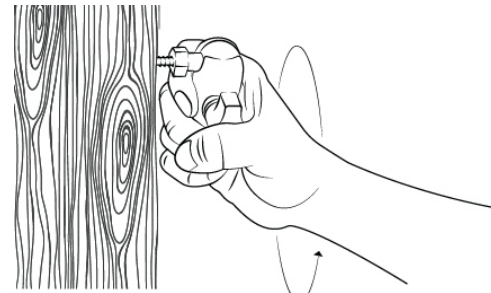

RAM Mounting Systems
8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com

Once installed, disassemble components and thread 1/4"-20 Ball into threaded hole of your camera. For some models, the mounting plate may need to be removed to expose the thread.

RAM MOUNTS
RPR-INS-B-379U-25201L




This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.

RAM® Tough-Tap™ Universal Trail Camera Mount - Assembly & Installation

The last trail cam mount you'll ever need.


Parts Index:

- A. Ball with Self-Tapping Threads (QTY. 1)
- B. Short Double Socket Arm (QTY. 1)
- C. Ball with 1/4"-20 Threads (QTY. 1)




Follow these steps for a tool-less installation. For surfaces too tough to install by hand, a 5/8" wrench may be used.


1. Assemble the ball components in the shown orientation: Self-tapping threads pointing sideways, 1/4"-20 thread facing upward.



2. Grab onto Socket Arm and 1/4"-20 Ball, and position self-tapping threads against desired mounting point.

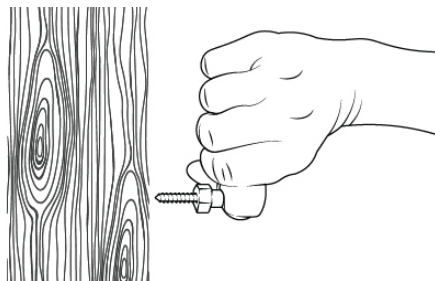

3. Turn clockwise to drive mount into surface.

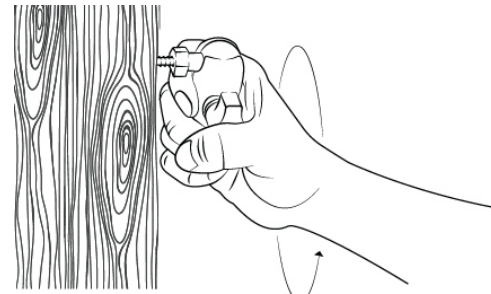

RAM Mounting Systems
8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com

Once installed, disassemble components and thread 1/4"-20 Ball into threaded hole of your camera. For some models, the mounting plate may need to be removed to expose the thread.

RAM MOUNTS
RPR-INS-B-379U-25201L

This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.